


## PRODUCTS


### HIGH RELIABILITY MEMBRANE SWITCH KEYBOARD

Full travel alphanumeric keyboards that can be tailored to OEM applications use a membrane switch technology for a life rating of 50M operations/key and a contact bounce typically <2 ms. Modular FASTYPE™ units operate with a consistent force of 3 to 5 oz (0.8 to 1.4 N)/key and 5 to 7 oz (1.4 to 1.9 N)/space bar over a 0.150" (0.381-cm) travel. Key will not loosen or rattle in frames. Flextail terminations are std. **Chomerics, Inc.**, 77 Dragon Ct, Woburn, MA 01801.

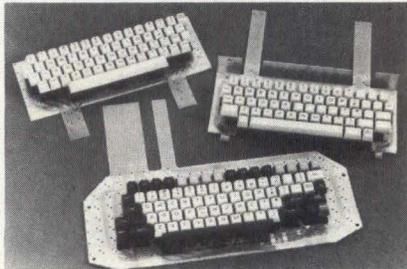

Circle 224 on Inquiry Card

### 4.8M-BYTE DISC MEMORY UNIT

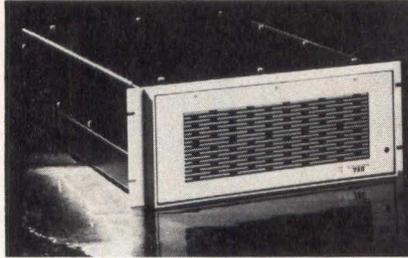

Model 750 features a closed recirculating air system that provides extended operation in nonsevere environments without periodic maintenance. Head and disc enhancements double capacity of the model 700, providing capacity for 4.8M bytes max, without adding tracks or components. Available controllers allow attachment to DEC and Data General computer systems. **Digital Development Corp.**, 8650 Balboa Ave, San Diego, CA 92123. Circle 225 on Inquiry Card

### FRACTIONAL HORSEPOWER DC MOTORS

Measuring 1.37" (3.48-cm) in dia, series 3540 and 3557 motors are furnished in ball bearing or sintered bear-

ing versions with double-ended shafts. They are also available with optical encoders (15, 100, and 200 pulses/r) and screw-on gearheads with ratios ranging from 12:1 to 54,880:1. Power outputs are up to 15 W; 7 std nom operating voltages range from 6 to 32 V. Continuous duty ratings include speeds over 5000 r/min and stall torque up to 6.4 oz-in (0.04 N•m). **Micro-Mo Electronics, Inc.**, 3691 Lee Rd, Cleveland, OH 44120.

Circle 226 on Inquiry Card

### 2-PORT INTELLIGENT MUX

DE-2 Data Express statistical multiplexer concentrates 2 asynchronous devices onto a single line. Features are total data transparency, ARQ error correction, and fast propagation of data using addressed char block. Buffering supports error correction and allows terminal data rates to temporarily exceed the modem composite speed. Diagnostics indicate status of the communications link; loop test mode allows data to be looped from the terminal through the multiplexer, and back. **Compre Comm, Inc.**, 51 E Chester St, Champaign, IL 61820.

Circle 227 on Inquiry Card

## Vinyl L-Caps For those applications that require longer than normal closures.

FREE! Catalogs and Samples



**L-Caps** are made longer (up to 5¼" in many sizes) for those industrial applications in which standard caps just don't work. As **L-Caps** are dip molded, you specify diameter and length.

**L-Caps** work great as stud and thread protectors, paint and shot blast masks, tubing covers, tool handle grips, connector caps, cable end seals, and in thousands of other applications.

Over 1,200 sizes are available in many material hardnesses, wall thicknesses, and bright colors. Customer instructions, warnings, company names and logos can be imprinted on the caps quickly and inexpensively.

Contact us now for free samples and information on the low **L-Cap** pricing.

**Sinclair & Rush, Inc.**  
6930 S. Broadway  
St. Louis, Mo. 63111 U.S.A.  
Phone: (314) 481 2450  
Telex: 442564



Save time. Save money. Eliminate loudspeakers and hand soldering with the new AT27 and AT32 Audio Transducers.

They mount directly to P.C. board; are wave solderable; low current drain; provide sound pressure levels of 75 or 90dBA at 1 foot at 2.0-2.9kHz. Frequency range of 1.6-4.0kHz. A 15Vpp signal will produce 80 to 95dBA.


For literature, write Projects Unlimited, Inc., 3680 Wyse Road, Dayton, Ohio 45414.

Phone: (513) 890-1918.  
TWX: 810-450-2523.



projects®  
unlimited

## NO SPEAKERS REQUIRED

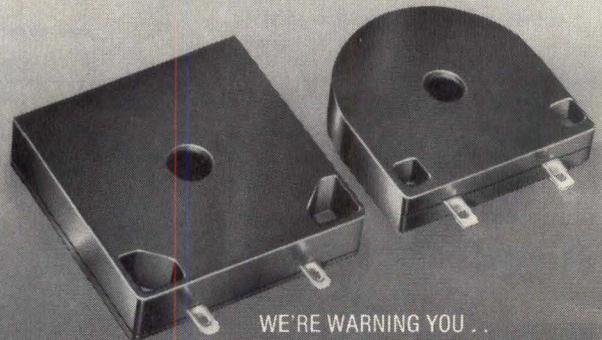

WE'RE WARNING YOU . . .