


CUSTOM MADE HIGH-PROFILE KEYBOARD

KAS16 Series

■ Features

1. Dust-proof design due to the key switch being integral with the housing.
2. Completely enclosed in an opening-free housing with the key contact mechanism covered with rubber cups.
3. Multiplying-key layout can be easily altered due to employment of a free-hooking interlocking bar integrated with keys.
4. Dust-proof capability concentration of up to 3,000mg per one cubic meter of atmosphere is assured.

■ Basic Structure

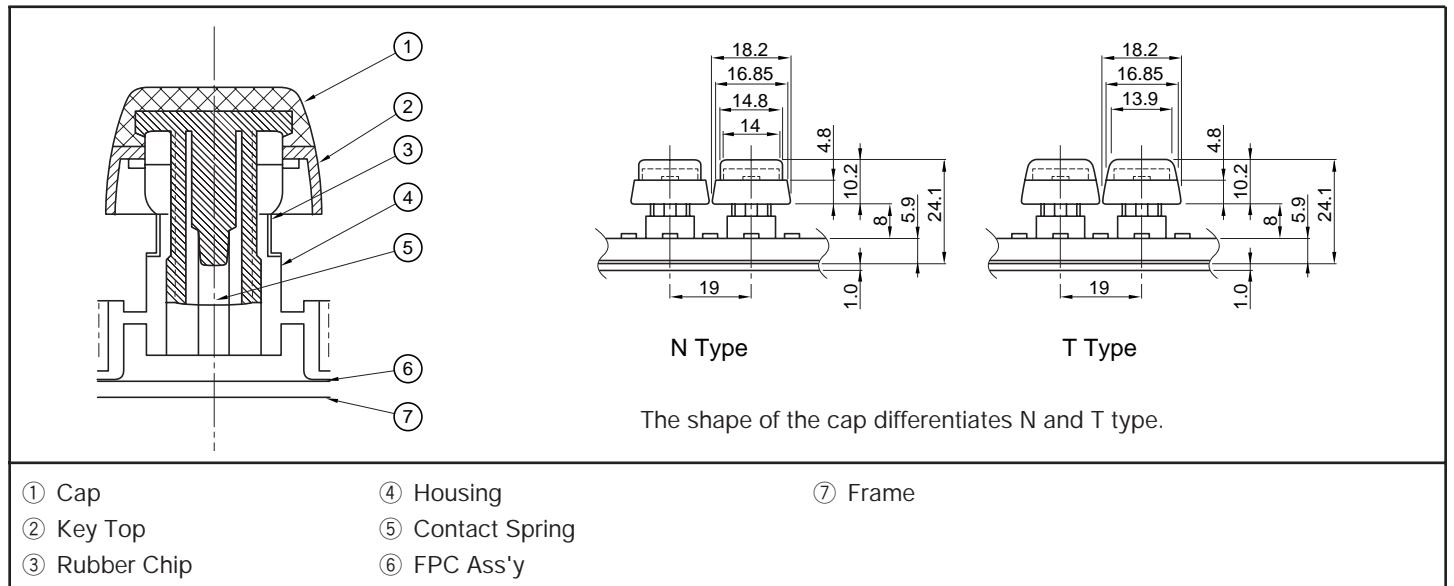

■ Specifications

Operating Force	55gf (0.539N)
Key Stroke	4mm
Maximum Rating	2mA 12V DC
Contact Resistance	1K Ω max.
Operating Life	1 x 10 ⁷ cycles

KAS16 Series

Key Switch Assembly Chart

Classification	① Cap			② Key Top	③ Contact Spring	④ Tapping Screw	⑤ Rubber Chip	⑥ Interlocking Bar	⑦ Hook
	Type	T Type	N Type						
1X1 Unit 	Clear Cap	221KBS-034-01	221KAS-009-00T With Home Position 221KAS-012-00T	302KAS-074-□□T	601KAS-001-01	-	422KAS-009-01	-	-
	Ten-Key Cap	221KBS-037-□□	221KAS-013-□□						
	Ten-Key with Home Position	221KBS-038-□□	221KAS-014-□□						
	Q'ty	1	1	1	1	-	1	-	-
2X1 Unit 	Clear Cap	221KBS-035-01	221KAS-010-00T	302KAS-075-□□T	601KAS-001-01	Z-D1000-955	422KAS-009-02	321KAS-031-00T	541KAS-003-00T
	Ten-Key Cap	221KBS-039-□□	221KAS-015-□□						
	Q'ty	1	1	1	1	1	1	2	1
2X2 Unit 	Clear Cap	221KBS-036-01	221KAS-011-00T	302KAS-076-□□T	601KAS-001-01	Z-D1000-955	422KAS-009-02	321KAS-031-00T	541KAS-004-00T
	Q'ty	1	1	1	1	1	2	2	2

Note: 1. □ contained in the above cap model numbers are digits designating required characters of colors.
 2. Available cap shapes are shown on the right.

