


## PRODUCTS

### IEEE-488 INTERFACE CHASSIS

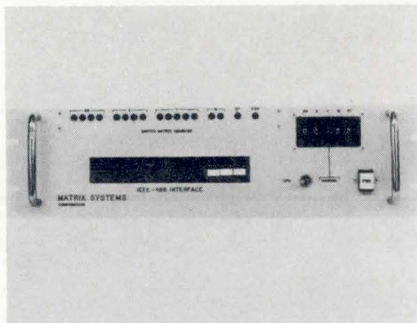

Model 6595-M interface acts as a listener on the IEEE-488 bus and converts the 8-bit parallel bus signal to a 16-bit TTL positive signal compatible with the relay matrix. Front panel LED display shows status of the 16-bit output from the unit. Available in CPU control configuration or with an alternate manual control feature, the chassis measures 5.25 x 19 x 15" (13.33 x 48 x 38 cm). **Matrix Systems Corp.**, 5177 N Douglas Fir Rd, Calabasas, CA 91302.

Circle 214 on Inquiry Card

### LSI-11 TO PRINTER ASYNCHRONOUS SERIAL INTERFACE

Offering complete DEC DLV-11F compatibility, MLSI-DLV-11F interface provides buffer ready/printer busy monitor circuit in the EIA mode. Features include four levels of priority interrupts; serial EIA-RS-232C/CCITT V.24 interface; 20-mA current loop interface; programmable, switch-selectable baud rates of 50 to 19.2k; and switch-selectable word character format, address, and interrupt vectors. **MDB Systems, Inc.**, 1995 N Batavia St, Orange, CA 92665.

Circle 215 on Inquiry Card

### SMALL, CODED ROTARY SWITCHES

For applications such as avionics, navigation, and telecommunications, series 56000 switches are fully sealed and contamination resistant, and measure 0.688" (1.747 cm) in diameter. Std features include 8 dial positions, knob actuation, and pin ter-

minals for PCB mating. Various dial positions, pull to turn isolation stops, and solder lug pin terminals are options. Shock resistance is greater than 100 Gs; rated current is 28 Vdc at 128 mA resistive; and op temp is -65 to 100 °C. **The Digitran Co.**, 855 S Arroyo Pkwy, Pasadena, CA 91105.

Circle 216 on Inquiry Card

### CAPACITANCE KEYBOARD

A replacement keyboard for Keytronics L1660, MPNK-72 is a low profile, solderless contact key switch keyboard featuring microprocessor controlled P/ROMs that allow custom programming. The device offers single 5-Vdc supply, automatic repeat, an electronic shift lock with LED target, and patented N-Key rollover. With rugged construction and rigid chassis mounting, it utilizes the replaceable silent "snap in" switch that offers greater than 100M keystroke MCBF. **Amkey, Inc.**, 220 Ballardvale St, Wilmington, MA 01887.

Circle 217 on Inquiry Card

#### DISTRIBUTED BY/

**ARROW ELECTRONICS, INC.**  
ELECTRONICS DISTRIBUTION DIVISION



#### NORTHEAST

Boston, Massachusetts (617) 933-8130  
Manchester, New Hampshire (603) 668-6968  
Rochester, New York (716) 275-0300  
Syracuse, New York (315) 652-1000  
Wallingford, Connecticut (203) 265-7741

#### MID-ATLANTIC

Baltimore, Maryland (301) 247-5200  
Hauppauge, New York (516) 231-1000  
Moorestown, New Jersey (609) 235-1900  
Saddle Brook, New Jersey (201) 797-5800

#### SOUTHEAST

Atlanta, Georgia (404) 449-8252  
Fort Lauderdale, Florida (305) 776-7790  
Melbourne, Florida (305) 725-1480  
Winston Salem, North Carolina (919) 725-8711

#### NORTH CENTRAL

Chicago, Illinois (312) 893-9420  
Milwaukee, Wisconsin (414) 764-6600  
Minneapolis, Minnesota (612) 830-1800

#### MIDWEST

Cincinnati, Ohio (513) 761-5432  
Cleveland, Ohio (216) 248-3990  
Dayton, Ohio (513) 435-5563  
Detroit, Michigan (313) 971-8220  
Indianapolis, Indiana (317) 243-9353  
Pittsburgh, Pennsylvania (412) 856-7000  
St. Louis, Missouri (314) 567-6888

#### WEST

Albuquerque, New Mexico (505) 243-4566  
Denver, Colorado (303) 758-2100  
San Diego, California (714) 565-4800  
San Francisco, California (408) 745-6600  
Seattle, Washington (206) 575-0907

#### SOUTH CENTRAL

Dallas, Texas (214) 386-7500  
Houston, Texas (713) 491-4100

Connector Operations  
Center (516) 231-1030

International, TWX (510) 224-6021



### The Ambassador III Portable Terminal... puts you in two places at the same time!

Whether you're transmitting data or retrieving it, the Portable Ambassador III Terminal with its built-in 300 baud telephone coupler gives you immediate access to all kinds of important data.

At a realistic price, the Ambassador III is the perfect companion for remote bureaus, insurance executives, salesmen, bankers, educators, accountants, stock brokers, or any profession where you're away from a central office and quick versatile, reliable communications are vital.

Consider these features: full 7" screen displays 24 lines of 80 characters per line. Weighs less than 20 pounds. Measures 18" x 15" x 8". Utilizes virtually any power source. Can be used anywhere in the world using ASCII standard protocol, conversational or time sharing. The Ambassador III's commands are also a subset of the DEC VT 103. **Telcon also manufactures the Ambassador IV with an 80 column printer.** For additional information contact the distributor's office nearest you.

TELECOMMUNICATIONS SYSTEMS AND EQUIPMENT  
**TELCON**  
INDUSTRIES, INC.

**Now...you can take  
your office with you.**

